

**Airtight Door    Sliding Door    Telescopic 3-Wings Door    Telescopic 2-Wings Door    Curved/Round Door    Swing Door    Heavy Duty Door**

**KTH KING TA HAN TECHNOLOGY CO. LTD.**


Location: Kaohsiung, Taiwan  
 Global Website: <http://www.kth-automaticdoor.com>  
 E-mail address: [export@kthtw.com](mailto:export@kthtw.com)  
[kth@kthtw.com](mailto:kth@kthtw.com)



# KTH S-30 SUPER HEAVY DOOR AUTOMATIC DOOR SYSTEM SERIES



# KTH S-30 SUPER HEAVY DOOR

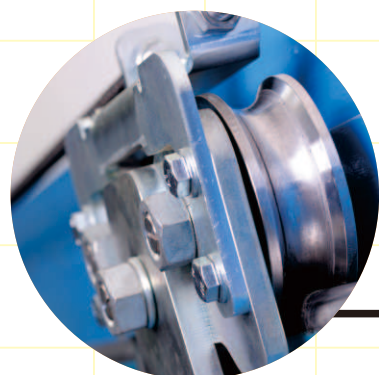


**DURABLE HANGING  
TWIN WHEEL**





**S-30 CONTROLLER  
WITH CTB DEVICE**

**DC24V 250W BRUSHLESS DC  
MOTOR (PLANETARY GEAR)**

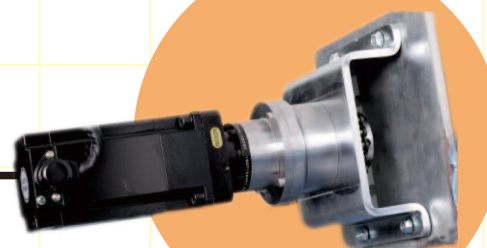

## Our Operator's Features

- ★ Install in factories, airports, military bases and other high security areas to be protected.
- ★ Special tracks and wheels, carrying heavier and more stable.
- ★ Using a large radius of the pulley and greatly reduce noise and enhance the useful time.
- ★ DC24V 250W Brushless DC Motor. (Planetary Gear)

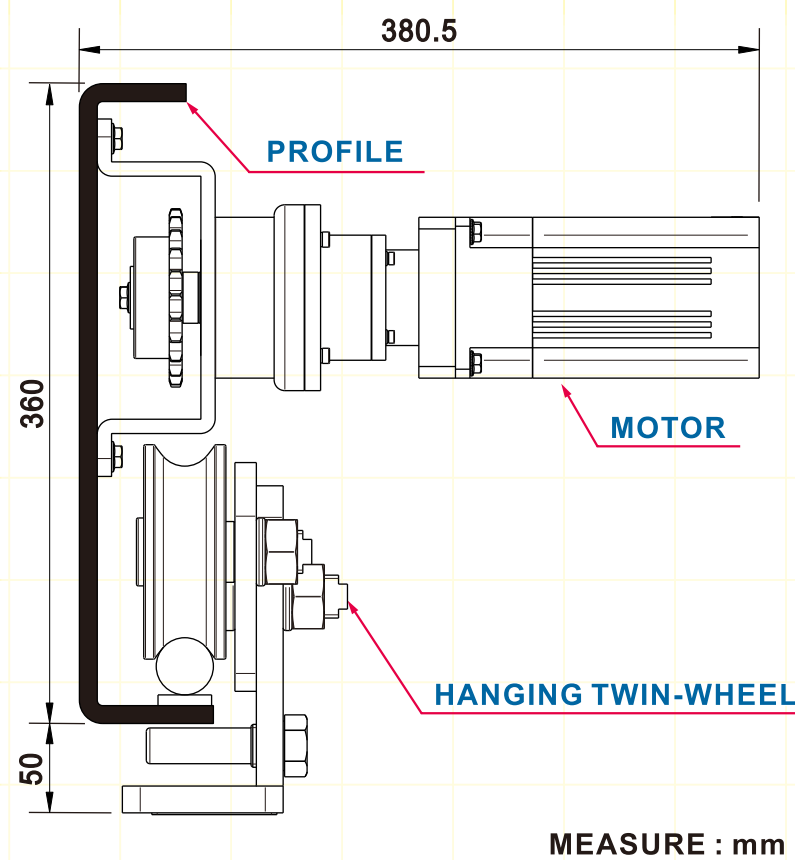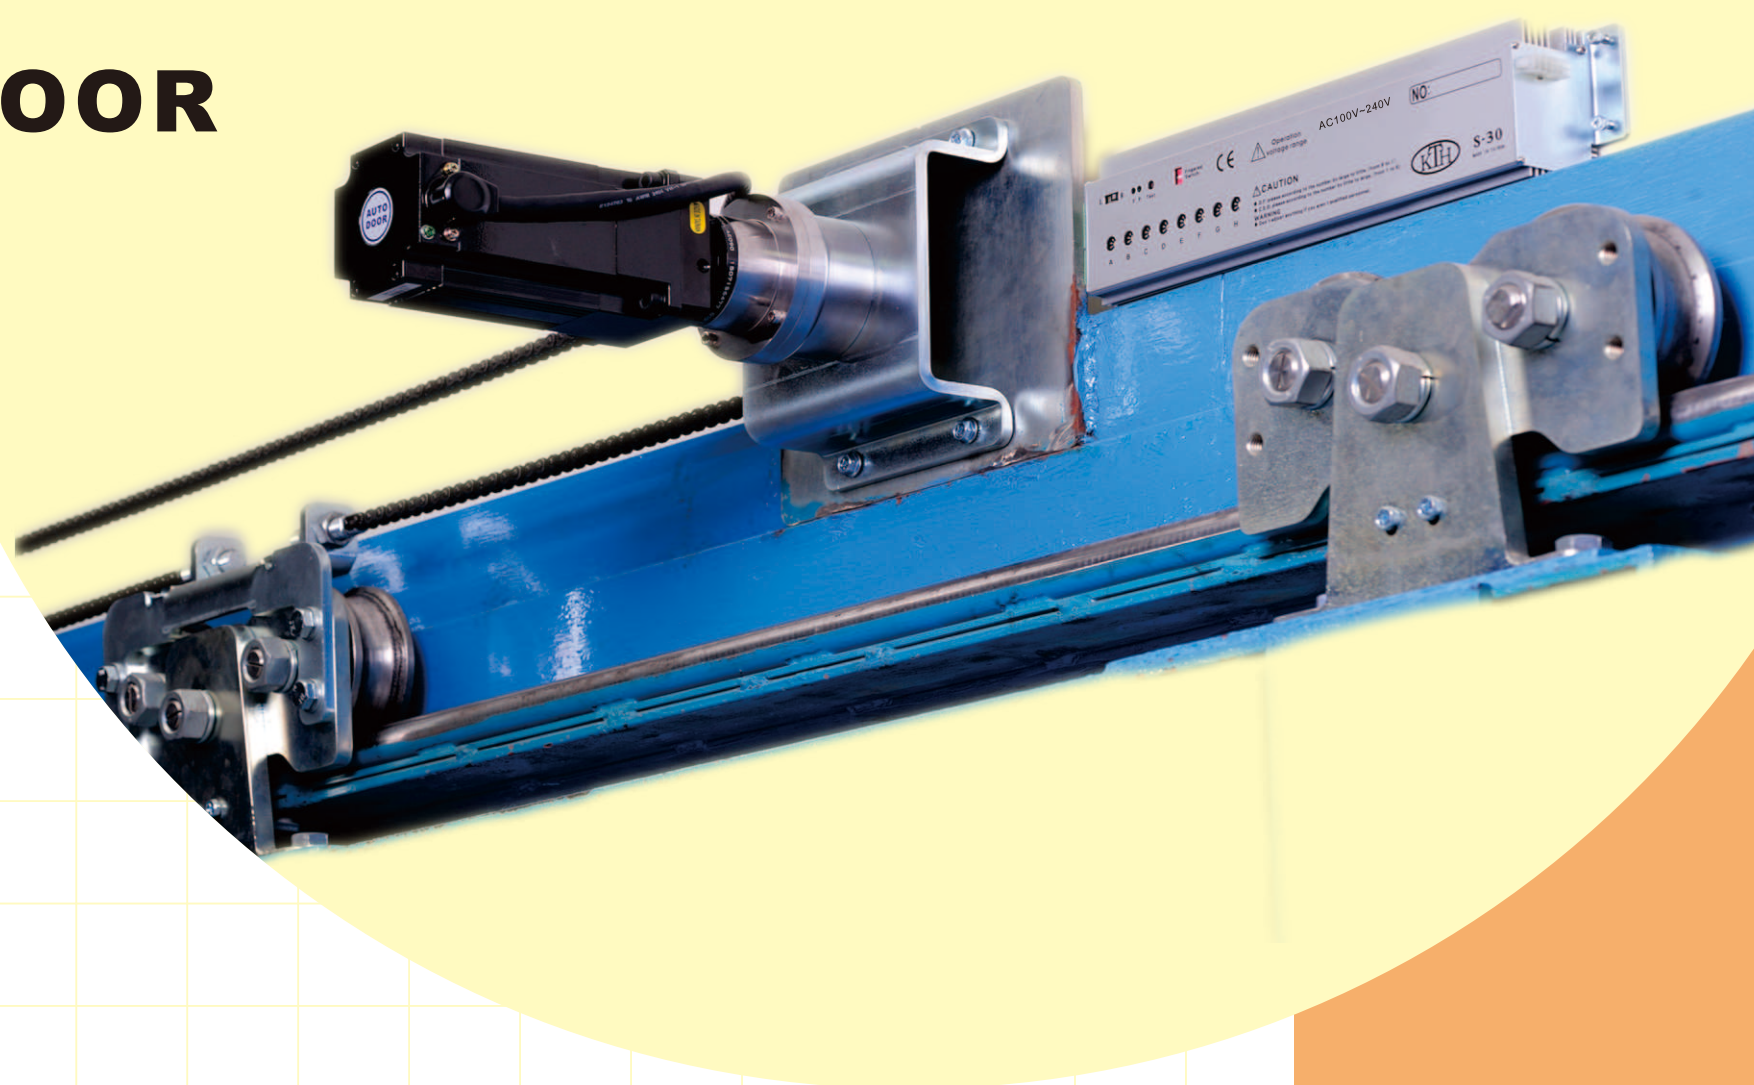

TYPE	S-30	
MODEL	SINGLE-WINGED	BI-PARTING
DOOR WEIGHT	2000kg X1(DOOR)	1500kg X2(DOOR)
DOOR WIDTH	1M~6M	1M~6M
INSTALL WAY	SURFACE INSTALL	SURFACE INSTALL
MOTOR	DC24V 250W BRUSHLESS DC MOTOR (PLANETARY GEAR)	
CONTROL	STANDARD MICRO-CONTROL	
POWER CONSUMPTION	250W	
VOLTAGE	AC100V~240V	
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃	
VOLUME	65 DECIBEL(MAX.)	
STARTING SPEED	150mm/SEC.	120mm/SEC.
STARTING TIMES	0~20 SEC. (REGULABLE)	
TRANSMISSION IMPORTANT CONDITION	ROLLER CHAIN 40-1R	
OPENING DOOR RANGE	FULL/HALF-OPEN (REGULABLE)	
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)	
TRACTION FORCE	WHEN POWER OFF THE DOOR CAN BE OPENED BY MANUAL	