


Airtight Door Sliding Door Telescopic 3-Wings Door Telescopic 2-Wings Door



Curved/Round Door Swing Door Heavy Duty Door

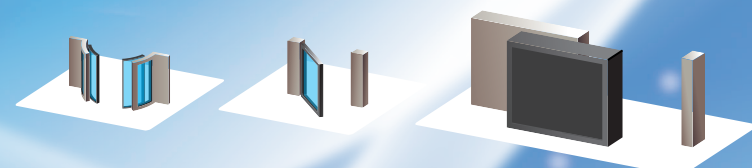

KTH KING TA HAN TECHNOLOGY CO. LTD.

Location: Kaohsiung, Taiwan
Global Website: <http://www.kth-automaticdoor.com>
E-mail address: kth@kthtw.com




SW-2 SWING DOOR

AUTOMATIC DOOR SYSTEM SERIES




Registration Number: 8476815113

KTH SW-2 SWING DOOR


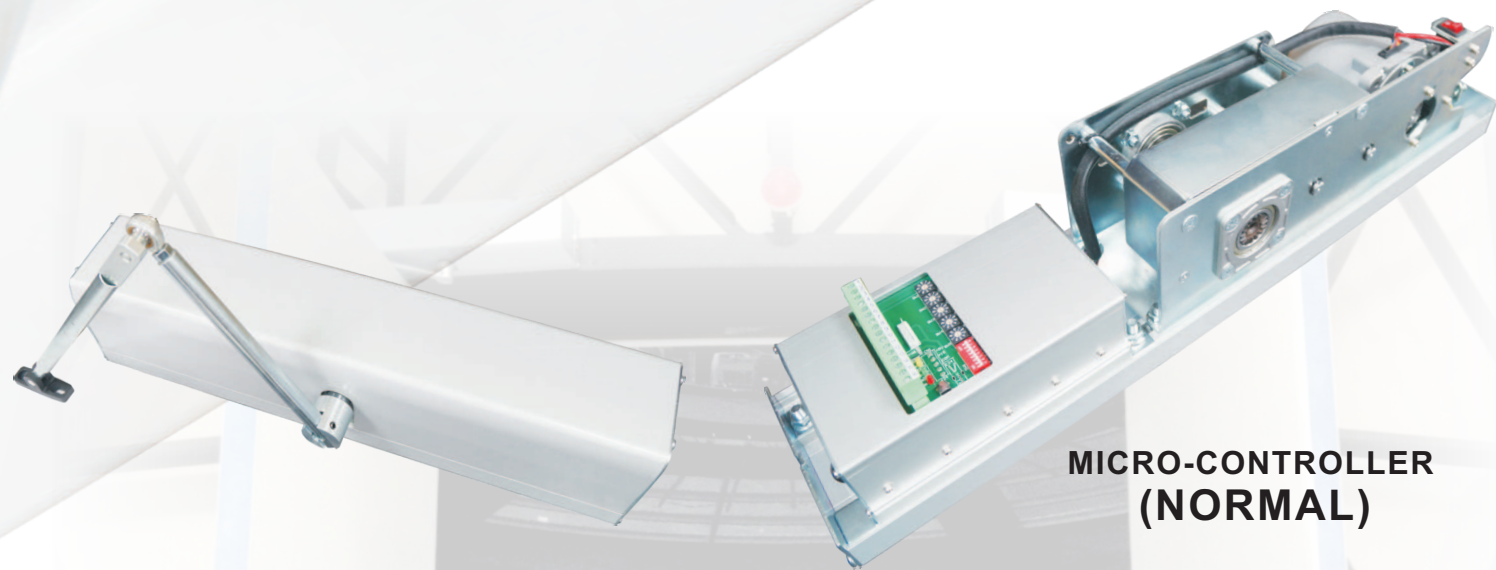


● OUTWARD ARM ASSEMBLY

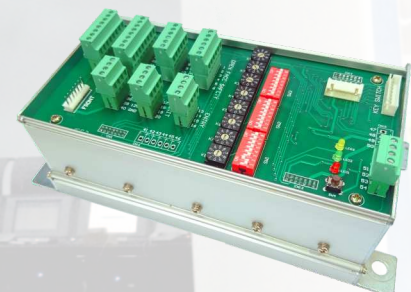


● INWARD ARM ASSEMBLY

- **LOADING WEIGHT:**
250KG X 1M/150KG X 1.5M
- **“CATCH RETURN” FUNCTION**, IT MUST BE SAFER FOR USER.
- **PARTICULAR MEMORY MODE FOR “OPENING DISTANCE SETTING”**.
- **TWO LOCK FUNCTIONS COULD BE CHOSEN:**
(FAIL-SAFE/FAIL-SECURE) ELECTRIC LOCK.

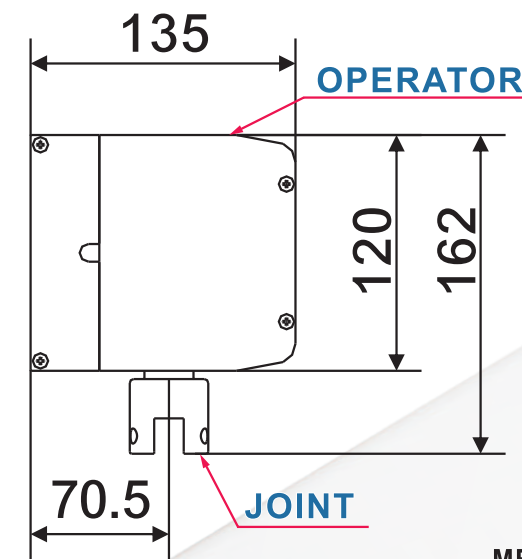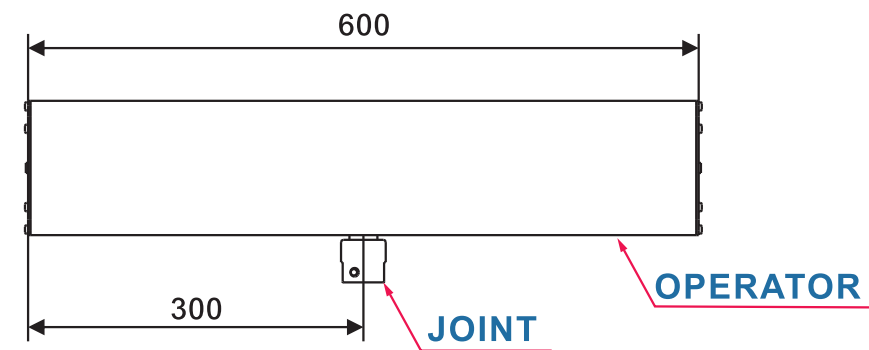

MEASURE : mm

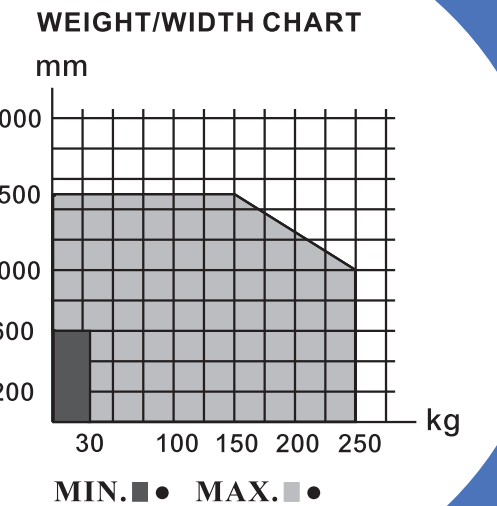

SPECIFICATION

TYPE	SW-2	
MODEL	OUTWARD	INWARD
MOTOR	DC24V 120W BRUSHLESS DC MOTOR	
CONTROL	STANDARD MICRO-CONTROL	
POWER CONSUMPTION	120W	
VOLTAGE	AC100V~240V	
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃	
VOLUME	55 DECIBEL(MAX.)	
SPEED of OPENING 90° TIME	3~10 SEC. /90° (MAX.)	
STARTING TIMES	0~20 SEC. (REGULABLE)	
TRANSMISSION IMPORTANT CONDITION	OUTWARD ARM ASSEMBLY	INWARD ARM ASSEMBLY
OPENING DOOR RANGE	120° (MAX.)/90° (DEFAULT)	
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)	
TRACTION FORCE	2.5 kg	